



(11) **EP 1 667 388 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**07.06.2006 Bulletin 2006/23**

(51) Int Cl.:  
**H04L 12/58 (2006.01)**

(21) Application number: **04257540.7**

(22) Date of filing: **03.12.2004**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**  
Designated Extension States:  
**AL BA HR LV MK YU**

• **Hardy, Michael T.**  
**Waterloo, Ontario, N2T 2J8 (CN)**  
• **May, Darrell R.**  
**Waterloo, Ontario, N2V 2K6 (CN)**

(71) Applicant: **Research In Motion Limited**  
**Waterloo, Ontario N2L 3W8 (CA)**


(74) Representative: **Roberts, Gwilym Vaughan et al**  
**Kilburn & Strode**  
**20 Red Lion Street**  
**London WC1R 4PJ (GB)**

(72) Inventors:  
• **Burns, Anthony G.**  
**Waterloo, Ontario, N2K 2X4 (CN)**

Remarks:  
Amended claims in accordance with Rule 86 (2) EPC.

(54) **Method and apparatus for efficient resending of messages using message ID**

(57) An enhanced email system incorporating mobile wireless communication devices includes program logic for efficiently managing (i.e., at least partially synchronizing) "messages sent" files in the mobile device and in a related message server. The exemplary program logic also more efficiently handles resending of previously sent email messages from the mobile wireless communication device (especially in the context of synchronized messages sent files) by sending to the message server only abbreviated unique message ID in the first instance. In this way, wireless bandwidth is conserved as is the device battery.

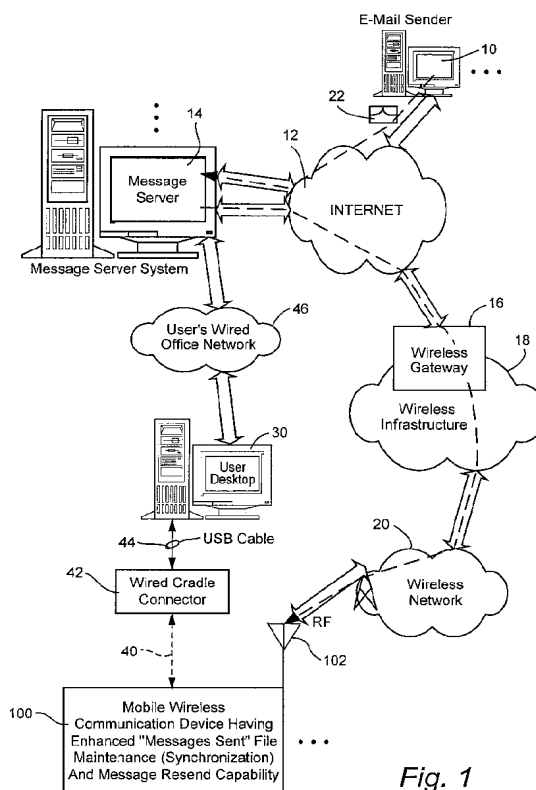

**Fig. 1**

## Description

### BACKGROUND

#### 1. Technical Field

**[0001]** This invention relates to apparatus, method and stored computer program media for managing "messages sent" files and/or resending of messages from mobile wireless communication devices.

#### 2. Related Art

**[0002]** Various email systems are now well known and utilized by millions on a daily basis. Email systems typically maintain a stored file or folder containing current opened and unopened mail, previously sent mail, messages that have been "deleted" (e.g., in a "trash" file until also deleted therefrom), email address files for various categories of parties with whom communications have been made or may be made in the future (e.g., an "address book") and the like. Sometimes email systems also incorporate calendar, personal contact data, documents, check lists and the like as well.

**[0003]** Besides composing new email messages and sending them, most systems also include features for forwarding received emails onward to other recipients and for resending previously sent messages (e.g., possibly retracting the earlier message in favor of a later version or possibly sending the same message on to additional recipients or possibly resending a message which for some reason went astray and was never acknowledged or actually received by the intended recipient.

**[0004]** Such email systems become considerably more complicated when they include mobile wireless communication devices as well as a user's base PC or enterprise message server or the like. In this more complex email system, a given email message may have originated at the user's desktop PC (or at somebody else's PC or otherwise) or may have originated in the first instance from the mobile wireless communication device itself. It is thus possible that the file of previously sent messages maintained in the mobile wireless communication device is not always synchronized (i.e., identical in content) with the file of previously sent messages for that particular user (in either the user's desktop PC base unit or a message server associated therewith for an entire enterprise). While synchronization of address books and the like between a user's PC base unit and a mobile PDA or the like has been known for some time, many if not all prior email systems incorporating mobile wireless communication devices have apparently not maintained well synchronized "message sent" files. Perhaps at least partially for such reasons, when a message is being resent from a user's mobile wireless communication device, it has heretofore typically involved resending of the entire message (e.g., the message header and message

body text in full) from the mobile wireless communication device to an enterprise message server or the like (from which that particular message was then re-iterated to the same or new message recipients).

**[0005]** At the same time, typically such prior email systems incorporating mobile wireless communication devices have for a long time used a shortcut technique for effecting replies to received messages and/or forwarding of received messages from the mobile wireless communication device. In particular, since in such instances the received message must already be resident at the enterprise message server which sent it to the mobile wireless communication device, rather than including the entire received message text in a reply to or forwarding of that message, an abbreviated unique reference ID was instead transmitted back to the enterprise message server. This reference ID was then treated as a request to find the appropriate uniquely associated message and then to add the reply text thereto and send it onward and/or to forward the message (possibly also with additional added message text).

**[0006]** However, in spite of the fact that such shortcut techniques/protocols have been in existence for many years in this context for replying to and/or forwarding incoming messages from a mobile wireless communication device, it does not appear that analogous shortcut technique previously has been used for resending previously sent messages. In the past, when a message was resent from the mobile device, the entire contents of the message was sent from the device to the server. In some cases, particularly if there is not complete 100% current message syncing of the sent message files), not all previously sent message information (e.g., message body text) may be available at the mobile wireless communication device. However (particularly if synchronization of sent files is well maintained), then full message information for each previously sent message is likely to be already available at the server. Nevertheless, the prior art practice effectively has ignored this situation and required redundant message information to be sent across the wireless network which has been a waste of network -- bandwidth and device battery.

### BRIEF SUMMARY

**[0007]** We have now recognized that it is possible to avoid such needless waste of wireless bandwidth and/or device battery.

**[0008]** The exemplary embodiments initially sends to the server only an abbreviated (but unique reference ID of the message to be resent, similar to what has previously been done for replies and forwards. If the server recognizes the reference ID (i.e., has the message already stored) it simply resends that particular message. If not, the server informs the device that the received reference ID is unknown, and the device then sends the entire message (as it knows it) back to the server for resending.

**[0009]** This saves network bandwidth because in most cases the server already will have the original sent message available. When the server does not (hopefully a rare occurrence if the "sent message" files are frequently synchronized), the prior mechanism of requesting the device's version of the complete message is still available, so there is no downgrade of service from the user's perspective.

**[0010]** As may be noted, this is related to the previous protocol used when doing replies and forwards from the device. It has now become apparent that this needs to be extended to resends, particularly with the introduction of syncing of sent items - but wherein the syncing may also be abbreviated such that only message headers and reference ID's are regularly maintained at the device (i.e., for messages originating elsewhere). In this case, the device typically does not have the entire message on the device (just the message header) and typical prior implementations would require the device to request the entire message to be delivered to the device before the user could then resend that same message back from the device.

**[0011]** The exemplary protocol now allows resend from the mobile device by using, in most cases, only the message reference ID. That is, to resend the server now resends the original message as is (using the reference ID supplied by the device to find it). The identified message is simply found by the server and resent. If the message cannot be found by the server, the server responds with a transaction error. The device then sends the data that it has for this message (forward, reply or resend). Benefits of sending a reference ID (versus actual full message text data) at least include significant reduction in required network bandwidth and reduced device battery load. For example, in most cases, only a relatively small-sized reference ID will be required for sending to the server - rather than the whole message itself (which could be thousands of bytes).

**[0012]** For various reasons (in general, to save memory space on the device), the original message body may be truncated on the device. This is certainly true for messages that were originally sent from the user's desktop, but may also be true for messages truncated due to low memory storage conditions on the device. It is clearly a preferred method to not have to always download the entire message body to the device just to resend the same message back to the server from the device.

**[0013]** The invention may be embedded in hardware, software or a combination of hardware and software. The invention provides a method for achieving enhanced management of "messages sent" files and/or the resending of messages from mobile wireless communication devices. The exemplary embodiment is realized, in part, by executable computer program code (i.e., logic) which may be embedded in physical program memory media.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0014]** These and other objects and advantages of this invention will be more completely understood and appreciated by careful study of the following more detailed description of at least one exemplary embodiment in conjunction with the accompanying drawings, in which:

FIG. 1 is an overall system wide schematic view of an exemplary wireless email communication system incorporating a mobile wireless communication device having enhanced "messages sent" file maintenance (synchronization) and message resend capability in accordance with one exemplary embodiment of this invention;

FIG. 2 is an abbreviated schematic diagram of hardware included within an exemplary mobile wireless communication device of FIG. 1;

FIG. 3 is an exemplary abbreviated schematic flowchart of computer software (i.e., program logic) that may be utilized, in parallel, in the device of FIG. 2 and the message server of FIG. 1 to achieve an exemplary synchronization of "message sent" files at the device and server sides, respectively; and

FIG. 4 is an exemplary of abbreviated schematic flowchart of computer software (i.e., program logic) that may be utilized in the device of FIG. 2 and the message server of FIG. 1 to achieve a more efficient resend message functionality in the device and server, respectively.

## DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

**[0015]** FIG. 1 is an overview of an exemplary communication system in which a wireless communication device 100 (with an optional wired connection port 40) may be used in accordance with this invention. One skilled in the art will appreciate that there may be hundreds of different system topologies. There may also be many message senders and recipients. The simple exemplary system shown in FIG. 1 is for illustrative purposes only, and shows perhaps the currently most prevalent Internet e-mail environment.

**[0016]** FIG. 1 shows an e-mail sender 10, the Internet 12, a message server system 14, a wireless gateway 16, wireless infrastructure 18, a wireless network 20 and a mobile communication device 100.

**[0017]** An e-mail sender 10 may, for example, be connected to an ISP (Internet Service Provider) on which a user of the system has an account, located within a company, possibly connected to a local area network (LAN), and connected to the Internet 12, or connected to the Internet 12 through a large ASP (application service provider) such as American Online™ (AOL). Those skilled in the art will appreciate that the systems shown in FIG. 1 may instead be connected to a wide area network (WAN) other than the Internet, although e-mail transfers

are commonly accomplished through Internet-connected arrangements as shown in FIG. 1.

**[0018]** The message server **14** may be implemented, for example, on a network computer within the firewall of a corporation, a computer within an ISP or ASP system or the like, and acts as the main interface for e-mail exchange over the Internet **12**. Although other messaging systems might not require a message server system **14**, a mobile device **100** configured for receiving and possibly sending e-mail will normally be associated with an account on a message server. Perhaps the two most common message servers are Microsoft Exchange™ and Lotus Domino™. These products are often used in conjunction with Internet mail routers that route and deliver mail. These intermediate components are not shown in FIG. 1, as they do not directly play a role in the invention described below. Message servers such as server **14** typically extend beyond just e-mail sending and receiving; they also include dynamic database storage engines that have predefined database formats for data like calendars, to-do lists, task lists, e-mail and documentation.

**[0019]** The wireless gateway **16** and infrastructure **18** provide a link between the Internet **12** and wireless network **20**. The wireless infrastructure **18** determines the most likely network for locating a given user and tracks the users as they roam between countries or networks. A message is then delivered to the mobile device **100** via wireless transmission, typically at a radio frequency (RF), from a base station in the wireless network **20** to the mobile device **100**. The particular network **20** may be virtually any wireless network over which messages may be exchanged with a mobile communication device.

**[0020]** As shown in FIG. 1, a composed e-mail message **22** is sent by the e-mail sender **10**, located somewhere on the Internet **12**. This message **22** typically uses traditional Simple Mail Transfer Protocol (SMTP), RFC **822** headers and multipurpose Internet Mail Extension (MIME) body parts to define the format of the mail message. These techniques are all well known to those skilled in the art. The message **22** arrives at the message server **14** and is normally stored in a message store. Most known messaging systems support a so-called "pull" message access scheme, wherein the mobile device **100** must request that stored messages be forwarded by the message server to the mobile device **100**. Some systems provide for automatic routing of such messages which are addressed using a specific e-mail address associated with the mobile device **100**. In a preferred embodiment, messages addressed to a message server account associated with a host system such as a home computer or office computer **30** which belongs to the user of a mobile device **100** are redirected from the message server **14** to the mobile device **100** as they are received.

**[0021]** Regardless of the specific mechanism controlling forwarding of messages to mobile device **100**, the message **22**, or possibly a translated or reformatted version thereof, is sent to wireless gateway **16**. The wireless infrastructure **18** includes a series of connections to wire-

less network **20**. These connections could be Integrated Services Digital Network (ISDN), Frame Relay or T1 connections using the TCP/IP protocol used throughout the Internet. As used herein, the term "wireless network" is intended to include three different types of networks, those being (1) data-centric wireless networks, (2) voice-centric wireless networks and (3) dual-mode networks that can support both voice and data communications over the same physical base stations. Combined dual-mode networks include, but are not limited to, (1) Code Division Multiple Access (CDMA) networks, (2) the Group Special Mobile or the Global System for Mobile Communications (GSM) and the General Packet Radio Service (GPRS) networks, and (3) future third-generation (3G) networks like Enhanced Data-rates for Global Evolution (EDGE) and Universal Mobile Telecommunications Systems (UMTS). Some older examples of data-centric network include the Mobitex™ Radio Network and the DataTAC™ Radio Network. Examples of older voice-centric data networks include Personal Communication Systems (PCS) networks like GSM, and TDMA systems.

**[0022]** The wireless RF communication port connection is made via antenna **102** as depicted in FIG. 1. However, the mobile wireless/wired communication device **100** also typically has a wired (or perhaps wireless irda, Bluetooth, etc.) connection port **40** which mates with a connection in a wired cradle **42** to establish a wired digital communication link via a USB cable **44** to USB port of the user desktop computer **30**. As will be appreciated, the user's computer **30** is also connected to the user's wired office network **46** (as is the message server **14**).

**[0023]** As depicted in FIG. 2, mobile communication device **100** includes a suitable RF antenna **102** for wireless communication to/from wireless network **20**. Conventional RF, demodulation/modulation and decoding/coding circuits **104** are provided. As those in the art will appreciate, such circuits can involve possibly many digital signal processors (DSPs), microprocessors, filters, analog and digital circuits and the like. However, since such circuitry is well known in the art, it is not further described.

**[0024]** The mobile communication device **100** will also typically include a main control CPU **106** which operates under control of a stored program in program memory **108** (and which has access to data memory **110** and a message sent file **110a**). CPU **106** also communicates with a conventional keyboard **112**, display **114** (e.g., an LCD) and audio transducer or speaker **116**. A portion of program memory **108a** is available for storing an enhanced messages sent file synchronization and message resending sub-routine (which may also interface with and use an IT Policy resident in data memory **110**). Suitable computer program executable code is stored in portions of program memory **108a** to constitute the enhanced sub-routine logic described below. As also depicted in FIG. 2, the CPU **106** is typically connected to a wired cradle USB connector **40** (which is, in effect, a USB port).

**[0025]** In the preferred exemplary embodiment, provisions are made for maintaining at least partial synchronization of the messages sent files stored at the server **14** and the mobile wireless communication device **100**. The exemplary embodiment of synchronization is referred to as "partial" because the messages sent file at the device **100** may not include full text for each message but, instead, only an abbreviated reference ID (preferably with header data sufficient to be user-recognizable) or the like to identify uniquely a particular previously sent message. At the same time, the server **14** will generally have a copy of the complete text of all previously sent messages in its messages sent file. Of course, as those in the art will appreciate, there typically will be conventional file housekeeping features available to permit purging records from the message sent files as may be desired by the user (or as necessitated by maximum file capacity or the like to avoid an excessive number of entries in a message sent file for a particular user).

**[0026]** As depicted in FIG. 3, the device synchronization messages sent file sub-routine **300** may be activated by a user at device **100**. This causes a suitable "begin sync" signal **302** to be sent to the server **14** so as to also initiate the server synchronization message sent file sub-routine at **304**. During most, if not all, of the synchronization process, both sub-routines **300** and **304** are active. The server may thereafter simply wait for an expected synchronization communication **316** to be received (e.g., in a timed wait loop **306, 308**). If the expected synchronization communication **316** is not timely received from the device, then an error message is displayed at **310** and the server sub-routine is exited at **312**.

**[0027]** However, if the device sub-routine is operating successfully, then suitable synchronization message **316** will be generated at **314** and sent to the server. In an elementary implementation, this synchronization communication might include a listing of all message reference ID's for all messages now listed in the "messages sent" file at the device. However, as those in the art will appreciate, there are known file synchronization protocols and techniques that can, at least some of the time, make it unnecessary to exchange complete file content lists.

**[0028]** When the synchronization message from the device **100** is timely received, then it is processed at **318** so as to, in effect, compare (a) the received list of message ID's from the sent messages file at the device to (b) the current messages sent file content at the server. As previously noted, those in the art will appreciate that a laborious comparison of each and every entry in both files at each sync session can be avoided if desired under some circumstances.

**[0029]** If discrepancies are discovered at **320**, then suitable discrepancy data is generated (e.g., identify messages missing in either the device and server) and sent back to the device at **334** - before the timed wait loop **324, 326** is entered. If no discrepancies are noted at **320**, then a zero error (i.e., synchronized) signal will

be sent back to the device at **322** and another timed wait loop **324, 326** is then entered to await a successful synchronization signal (and message text for messages previously identified as missing at the server) back from the device. If this is not timely received from the device, then the received previously messages are stored and an error message may be displayed at **328** and the routine exited at **330**. Otherwise, if a successful synchronization signal from the device is timely received, then a successful synchronization message is displayed at **332** before exit is taken at **330**.

**[0030]** At the device **100**, after the initial synchronization data **316** is transmitted at **314**, a timed wait loop **336, 338** is entered to see if any discrepancies have been noted by the server in a return communication **340**. If the expected discrepancy data message **340** is not timely received, then an error message is displayed at **342** and exit of the sub-routine is taken at **344**. On the other hand, if a timely return message **340** is received, then it is processed at **346** so as to store missing message headers and message reference ID's or the like as may be necessary so as to synchronize (but preferably only partially) messages sent file at the device **100**. Upon completion of this processing, further processing is done at **348** so that any discovered missing messages at the server are sent to the server at **350** and/or a successive synchronization signal is generated and sent back to the server. A successful synchronization message is displayed at **352** before the device sub-routine is exited at **344**.

**[0031]** When synchronized messages sent files are frequently maintained at the device and server as already explained with respect to FIG. 3, then it is possible to more frequently than not save bandwidth and device battery by employing a resend message protocol such as depicted in FIG. 4. Here, for example, if a user wishes to resend a message from the device **100**, then a resend message sub-routine is entered at **400** and, using user-recognizable message identifying data (e.g., all or part of the message header data) available in the local sent messages file, only an abbreviated message reference ID is accessed (e.g., also available from the local sent messages file) at **402** and transmitted at **404** to the server **14**. This causes the server **14** to enter its enhanced resend message sub-routine at **406**. At **408**, the server **14** looks for the incoming message reference ID in its own, more complete, sent messages file. If such message is found to reside there in its entirety (which is most likely to happen in the exemplary embodiment), then the entire message is resent at **410** from the server and a confirmation of that event is sent at **412** back to device **100** before exit is taken at **414**. On the other hand, in the event (hopefully rare) that the server cannot find the message referenced by the incoming message reference ID at **408**, then, at **416**, a suitable request is sent from the server back to the device requesting more complete message details (e.g., the text of the message) as it may exist in the messages sent file of the device **100**.

**[0032]** After sending the initial message reference ID

at 402, the device 100 enters a timed wait loop 418, 420 waiting either confirmation of the resend or a request for more message data to come back to it from the server. If a timely return message is not received, then an error message is displayed at 422 and exit of the sub-routine is taken at 424. On the other hand, if a timely returning message is received, then a test is made at 426 to see whether the returned signal indicates a need to send the entire message (if available) back to the server 14. If not, then exit is immediately taken at 424. On the other hand, if the server does not have enough information to resend the message from its own files, then the entire message text is sent from the device back to the server at 428 before the device reenters the timed wait loop 418, 420 (to again await a confirmation of the resend having been successfully accomplished at the server 14).

[0033] If the server 14 sends a request for the entire message at 416, then it enters timed wait loop 430, 432 awaiting the requested further message data 434. If timely received, then control is passed back to 410 where the message is resent. If not timely received, then an error message is displayed at 436 and the sub-routine is exited at 438.

[0034] As those in the art will appreciate, the above described exemplary embodiments may be modified or varied in many ways while yet retaining novel features and advantages of this invention. Accordingly, all such modifications and variations are intended to be included within the scope of the appended claims.

## Claims

1. A mobile wireless email communication device capable of sending, receiving and re-sending email messages via an associated message server, said mobile device comprising:

a stored sent messages file including at least (a) unique message ID data and (b) user recognizable message identifying data for each of plural previously sent email messages; and message resend logic linked to said stored sent messages file which, in response to a user resend command initially sends to said associated server abbreviated resend message request that includes said unique message ID data but not an entire email message text.

2. A mobile wireless email communication device as in claim 1 wherein said message resend logic initially sends to said associated server a resend message request including as its data payload substantially only said unique message ID data.

3. A mobile wireless email communication device as in claim 1 wherein said message resend logic is also configured to respond to a subsequent request from

said server to send to said server a more extensive resend message request that includes substantially an entire email message text.

4. A mobile wireless email communication device as in claim 1 further comprising:

sent message file synchronization logic which is configured to exchange communications with said message server related to the content of a respectively corresponding sent messages file at the message server and thereby maintain in the mobile device sent messages file, for each sent message then stored at the message server, said at least (a) unique message ID data and (b) user-recognizable message identifying data.

5. A mobile wireless email communications device as in claim 4 wherein:

said sent message file synchronization logic is also configured to send back to said server, upon request therefrom substantially an entire email sent message record if a full copy of such sent email message is not found at the server during a synchronization session.

6. A method for resending email messages from mobile wireless email communication device capable of sending, receiving and re-sending email messages via an associated message server, said method comprising:

maintaining a stored sent messages file including at least (a) unique message ID data and (b) user recognizable message identifying data for each of plural previously sent email messages; and in response to a user resend command, initially sending to said associated server abbreviated resend message request that includes said unique message ID data but not an entire email message text.

7. A method as in claim 6 wherein:

said initially sending step sends to said associated server a resend message request including as its data payload substantially only said unique message ID data.

8. A method as in claim 6 further comprising:

in response to a subsequent request from said server, sending to said server from said device a more extensive resend message request that includes substantially an entire email message text.

9. A method as in claim 6 further comprising:

exchanging communications between said message server and said device related to the content of a respectively corresponding sent messages file at the message server and thereby maintaining in the mobile device sent messages file, for each sent message then stored at the message server, said at least (a) unique message ID data and (b) user-recognizable message identifying data.

10. A method as in claim 9 further comprising:

sending substantially an entire email send message record from the device to the server if a full copy of such sent email message is not found at the server during a synchronization session.

11. A stored computer program medium in which is stored at least one computer program which, when executed, effects a method for resending email messages from mobile wireless email communication device capable of sending, receiving and re-sending email messages via an associated message server, said method comprising:

maintaining a stored sent messages file including at least (a) unique message ID data and (b) user recognizable message identifying data for each of plural previously sent email messages; and  
in response to a user resend command, initially sending to said associated server abbreviated resend message request that includes said unique message ID data but not an entire email message text.

12. A stored computer program medium as in claim 11 wherein:

said initially sending step sends to said associated server a resend message request including as its data payload substantially only said unique message ID data.

13. A stored computer program medium as in claim 11 wherein said method further comprises:

in response to a subsequent request from said server, sending to said server from said device a more extensive resend message request that includes substantially an entire email message text.

14. A stored computer program medium as in claim 11 wherein said method further comprises:

exchanging communications between said message server and said device related to the content of a respectively corresponding sent messages file at the message server and thereby maintaining in the mobile device sent messages file, for each sent message then stored at the message server, said at least (a) unique message ID data and (b) user-recognizable message identifying data.

15. A stored computer program medium as in claim 11 wherein said method further comprising:

sending substantially an entire email sent message record from the device to the server if a full copy of such sent email message is not found at the server during a synchronization session.

16. An email message server capable of sending, receiving and re-sending email messages via an associated mobile wireless communication device, said server comprising:

a stored sent messages file including (a) unique message ID data, (b) user-recognizable message identifying data and (c) associated message text for each of a plurality of previously sent email messages; and  
message resend logic linked to said sent messages file which, in response to an abbreviated resend message request received from mobile wireless communication device including said unique message ID data for a particular sent message to be resent, uses the unique message ID data to search for a respectively corresponding locally stored sent message text and, if found, to resend that found email message.

17. An email message server as in claim 16 wherein said message resend logic is also configured to send to said mobile wireless communication device a request for said respectively corresponding stored sent message text if it is not found locally at the server.

18. An email message server as in claim 16 further comprising:

sent message file synchronization logic which is configured to exchange communications with said mobile wireless communication device related to the content of a respectively corresponding sent messages file at the mobile device and thereby maintain in the server sent messages file, for each sent message then stored in the mobile device, said (a) unique message ID data, (b) user-recognizable message identifying data and (c) associated message text.

19. A method for resending email messages from an email message server capable of sending, receiving and re-sending email messages via an associated mobile wireless communication device, said method comprising:

maintaining a stored sent messages file including (a) unique message ID data, (b) user-recognizable message identifying data and (c) associated message text for each of a plurality of previously sent email messages; and in response to an abbreviated resend message request received from mobile wireless communication device including said unique message ID data for a particular sent message to be re-sent, using the unique message ID data to search for a respectively corresponding locally stored sent message text and, if found, to resend that found email message.

20. A method as in claim 19 wherein a request for said respectively corresponding stored sent message text is sent to the device if it is not found locally at the server.

21. A method as in claim 19 further comprising:

exchanging communications between said mobile wireless communication device and said server related to the content of a respectively corresponding sent messages file at the mobile device and thereby maintain in the server sent messages file, for each sent message then stored in the mobile device, said (a) unique message ID data, (b) user-recognizable message identifying data and (c) associated message text.

22. A stored computer program medium in which is stored at least one computer program which when executed, effects a method for resending email messages from an email message server capable of sending, receiving and re-sending email messages via an associated mobile wireless communication device, said method comprising:

maintaining a stored sent messages file including (a) unique message ID data, (b) user-recognizable message identifying data and (c) associated message text for each of a plurality of previously sent email messages; and in response to an abbreviated resend message request received from mobile wireless communication device including said unique message ID data for a particular sent message to be re-sent, using the unique message ID data to search for a respectively corresponding locally stored sent message text and, if found, to resend

that found email message.

23. A stored computer program medium as in claim 22 wherein a request for said respectively corresponding stored sent message is sent to the device if it is not found locally at the server.

24. A stored computer program medium as in claim 12 wherein said method further comprises:

exchanging communications between said mobile wireless communication device and said server related to the content of a respectively corresponding sent messages file at the mobile device and thereby maintain in the server sent messages file, for each sent message then stored in the mobile device, said (a) unique message ID data, (b) user-recognizable message identifying data and (c) associated message text.

#### Amended claims in accordance with Rule 86(2) EPC.

1. A mobile wireless email communication device (100) capable of sending, receiving and re-sending email messages via an associated message server, said mobile device being **characterized by**:

a stored sent messages file (100a) including at least (a) unique message ID data and (b) user recognizable message identifying data for each of plural previously sent email messages; and message resend logic (108a) linked to said stored sent messages file which is configured to, in response to a user resend command, initially send to said associated server abbreviated resend message request that includes said unique message ID data but not an entire email message text.

2. A mobile wireless email communication device as in claim 1 wherein said message resend logic is configured to initially send to said associated server a resend message request including as its data payload substantially only said unique message ID data.

3. A mobile wireless email communication device as in claim 1 wherein said message resend logic is also configured to respond to a subsequent request from said server to send to said server a more extensive resend message request that includes substantially an entire email message text.

4. A mobile wireless email communication device as in claim 1 further comprising:

sent message file synchronization logic which

is configured to exchange communications with said message server related to the content of a respectively corresponding sent messages file at the message server and thereby maintain in the mobile device sent messages file, for each sent message then stored at the message server, said at least (a) unique message ID data and (b) user-recognizable message identifying data.

5. A mobile wireless email communications device as in claim 4 wherein:

said sent message file synchronization logic is also configured to send back to said server, upon request therefrom substantially an entire email sent message record if a full copy of such sent email message is not found at the server during a synchronization session.

6. A method for resending email messages from mobile wireless email communication device capable of sending, receiving and re-sending email messages via an associated message server, said method being **characterized by**:

maintaining (300) a stored sent messages file including at least (a) unique message ID data and (b) user recognizable message identifying data for each of plural previously sent email messages; and  
in response to a user resend command (400), initially sending (402) to said associated server abbreviated resend message request that includes said unique message ID data but not an entire email message text.

7. A method as in claim 6 wherein:

said initially sending step sends to said associated server a resend message request including as its data payload substantially only said unique message ID data.

8. A method as in claim 6 further comprising:

in response to a subsequent request from said server, sending to said server from said device a more extensive resend message request that includes substantially an entire email message text.

9. A method as in claim 6 further comprising:

exchanging communications between said message server and said device related to the content of a respectively corresponding sent messages file at the message server and thereby maintaining in the mobile device sent mes-

sages file, for each sent message then stored at the message server, said at least (a) unique message ID data and (b) user-recognizable message identifying data.

10. A method as in claim 9 further comprising:

sending substantially an entire email send message record from the device to the server if a full copy of such sent email message is not found at the server during a synchronization session.

11. A stored computer program medium in which is stored at least one computer program which, when executed, effects a method for resending email messages from mobile wireless email communication device capable of sending, receiving and re-sending email messages via an associated message server, said method being **characterized by**:

maintaining (300) a stored sent messages file including at least (a) unique message ID data and (b) user recognizable message identifying data for each of plural previously sent email messages; and  
in response to a user resend command (400), initially sending (402) to said associated server abbreviated resend message request that includes said unique message ID data but not an entire email message text.

12. A stored computer program medium as in claim 11 wherein:

said initially sending step sends to said associated server a resend message request including as its data payload substantially only said unique message ID data.

13. A stored computer program medium as in claim 11 wherein said method further comprises:

in response to a subsequent request from said server, sending to said server from said device a more extensive resend message request that includes substantially an entire email message text.

14. A stored computer program medium as in claim 11 wherein said method further comprises:

exchanging communications between said message server and said device related to the content of a respectively corresponding sent messages file at the message server and thereby maintaining in the mobile device sent messages file, for each sent message then stored at the message server, said at least (a) unique

message ID data and (b) user-recognizable message identifying data.

15. A stored computer program medium as in claim 11 wherein said method further comprising:

sending substantially an entire email sent message record from the device to the server if a full copy of such sent email message is not found at the server during a synchronization session.

16. An email message server capable of sending, receiving and re-sending email messages via an associated mobile wireless communication device, said server being **characterized by:**

a stored sent messages file (304) including (a) unique message ID data, (b) user-recognizable message identifying data and (c) associated message text for each of a plurality of previously sent email messages; and message resend logic (406) linked to said sent messages file which is configured to, in response to an abbreviated resend message request received from mobile wireless communication device including said unique message ID data for a particular sent message to be resent, use the unique message ID data to search for a respectively corresponding locally stored sent message text and, if found, to resend that found email message.

17. An email message server as in claim 16 wherein said message resend logic is also configured to send to said mobile wireless communication device a request for said respectively corresponding stored sent message text if it is not found locally at the server.

18. An email message server as in claim 16 further comprising:

sent message file synchronization logic which is configured to exchange communications with said mobile wireless communication device related to the content of a respectively corresponding sent messages file at the mobile device and thereby maintain in the server sent messages file, for each sent message then stored in the mobile device, said (a) unique message ID data, (b) user-recognizable message identifying data and (c) associated message text.

19. A method for resending email messages from an email message server capable of sending, receiving and re-sending email messages via an associated mobile wireless communication device, said method being **characterized by:**

maintaining (304) a stored sent messages file including (a) unique message ID data, (b) user-recognizable message identifying data and (c) associated message text for each of a plurality of previously sent email messages; and in response (406) to an abbreviated resend message request received from mobile wireless communication device including said unique message ID data for a particular sent message to be resent, using the unique message ID data to search for a respectively corresponding locally stored sent message text and, if found, to resend that found email message.

20. A method as in claim 19 wherein a request for said respectively corresponding stored sent message text is sent to the device if it is not found locally at the server.

21. A method as in claim 19 further comprising:

exchanging communications between said mobile wireless communication device and said server related to the content of a respectively corresponding sent messages file at the mobile device and thereby maintain in the server sent messages file, for each sent message then stored in the mobile device, said (a) unique message ID data, (b) user-recognizable message identifying data and (c) associated message text.

22. A stored computer program medium in which is stored at least one computer program which when executed, effects a method for resending email messages from an email message server capable of sending, receiving and re-sending email messages via an associated mobile wireless communication device, said method being **characterized by:**

maintaining (304) a stored sent messages file including (a) unique message ID data, (b) user-recognizable message identifying data and (c) associated message text for each of a plurality of previously sent email messages; and in response (406) to an abbreviated resend message request received from mobile wireless communication device including said unique message ID data for a particular sent message to be resent, using the unique message ID data to search for a respectively corresponding locally stored sent message text and, if found, to resend that found email message.

23. A stored computer program medium as in claim 22 wherein a request for said respectively corresponding stored sent message is sent to the device if it is not found locally at the server.

24. A stored computer program medium as in claim 12 wherein said method further comprises:

exchanging communications between said mobile wireless communication device and said server related to the content of a respectively corresponding sent messages file at the mobile device and thereby maintain in the server sent messages file, for each sent message then stored in the mobile device, said (a) unique message ID data, (b) user-recognizable message identifying data and (c) associated message text.

5

10

15

20

25

30


35

40

45

50

55

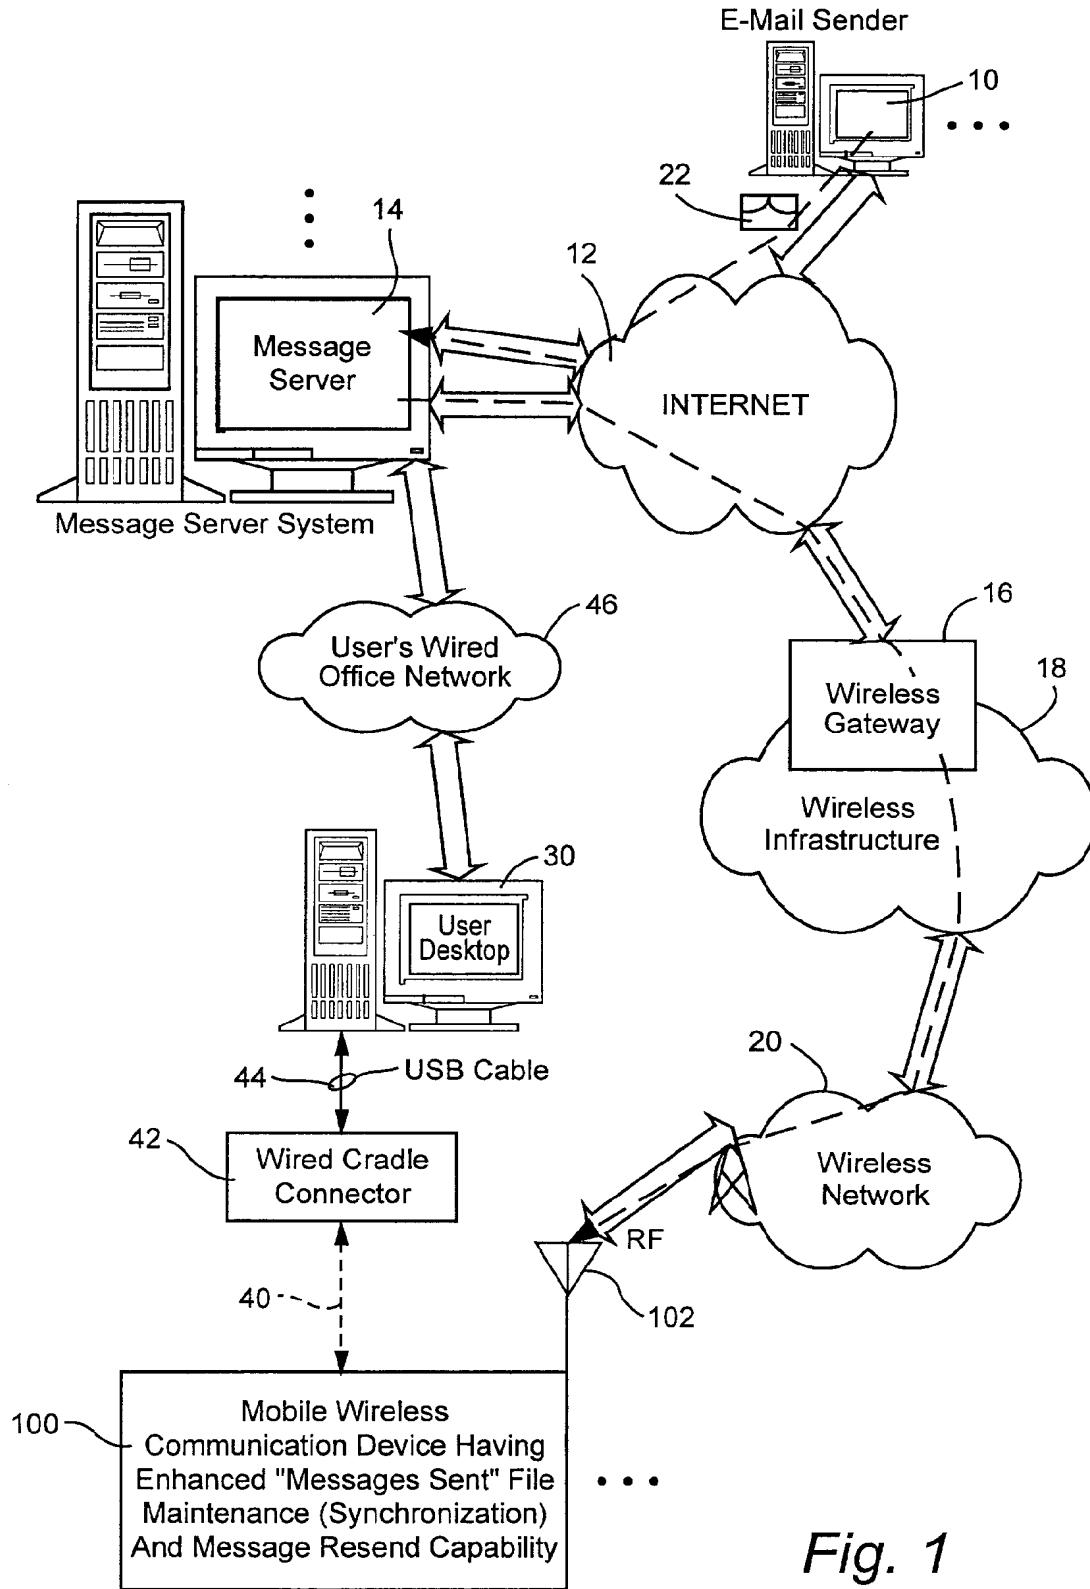

*Fig. 1*

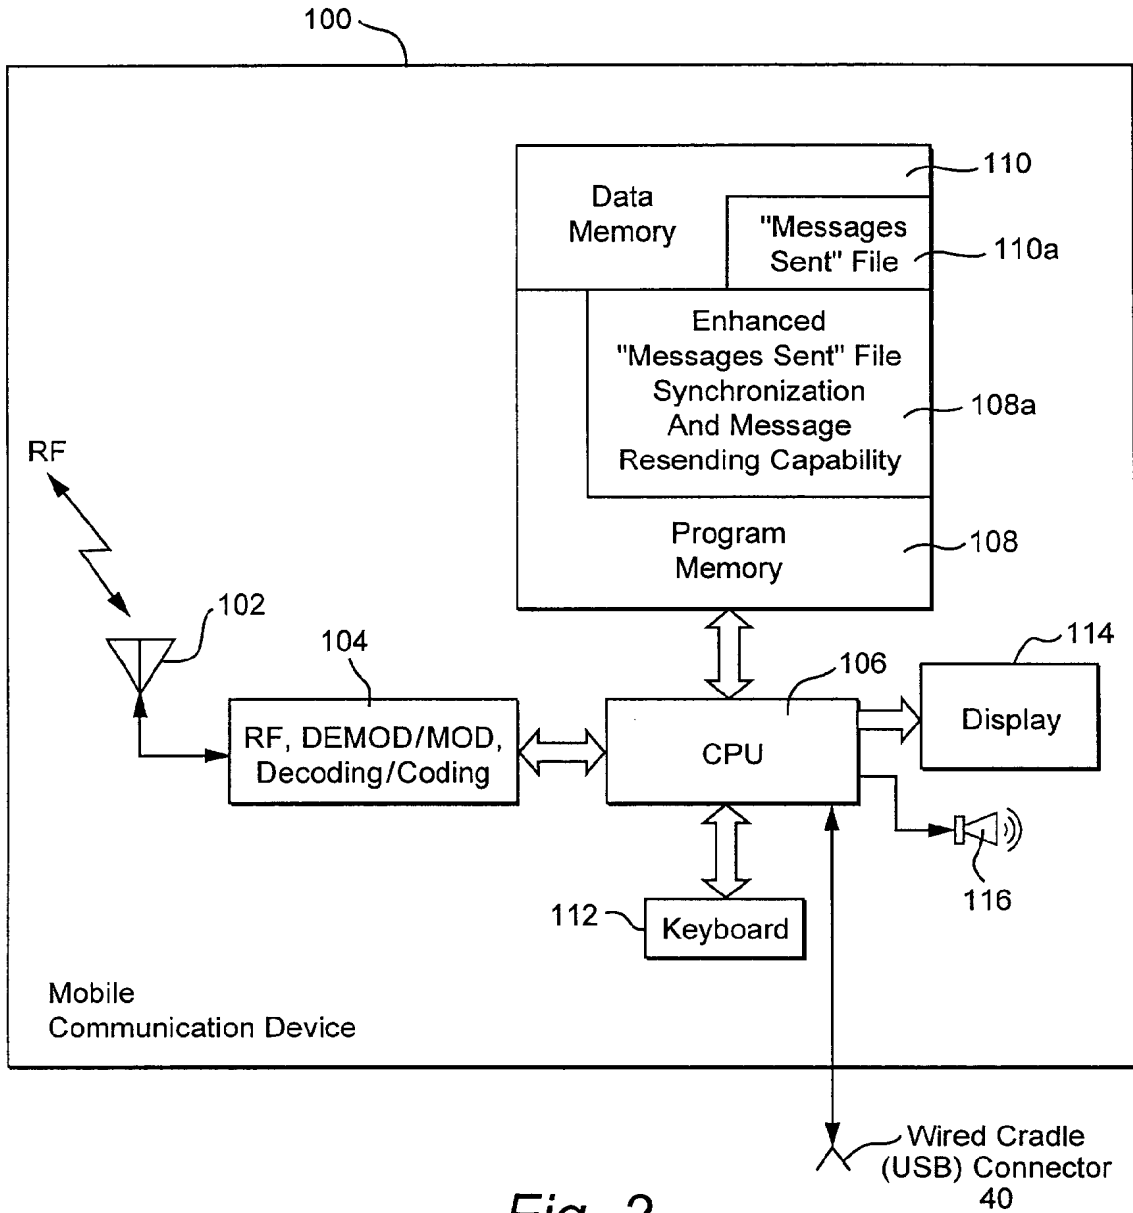
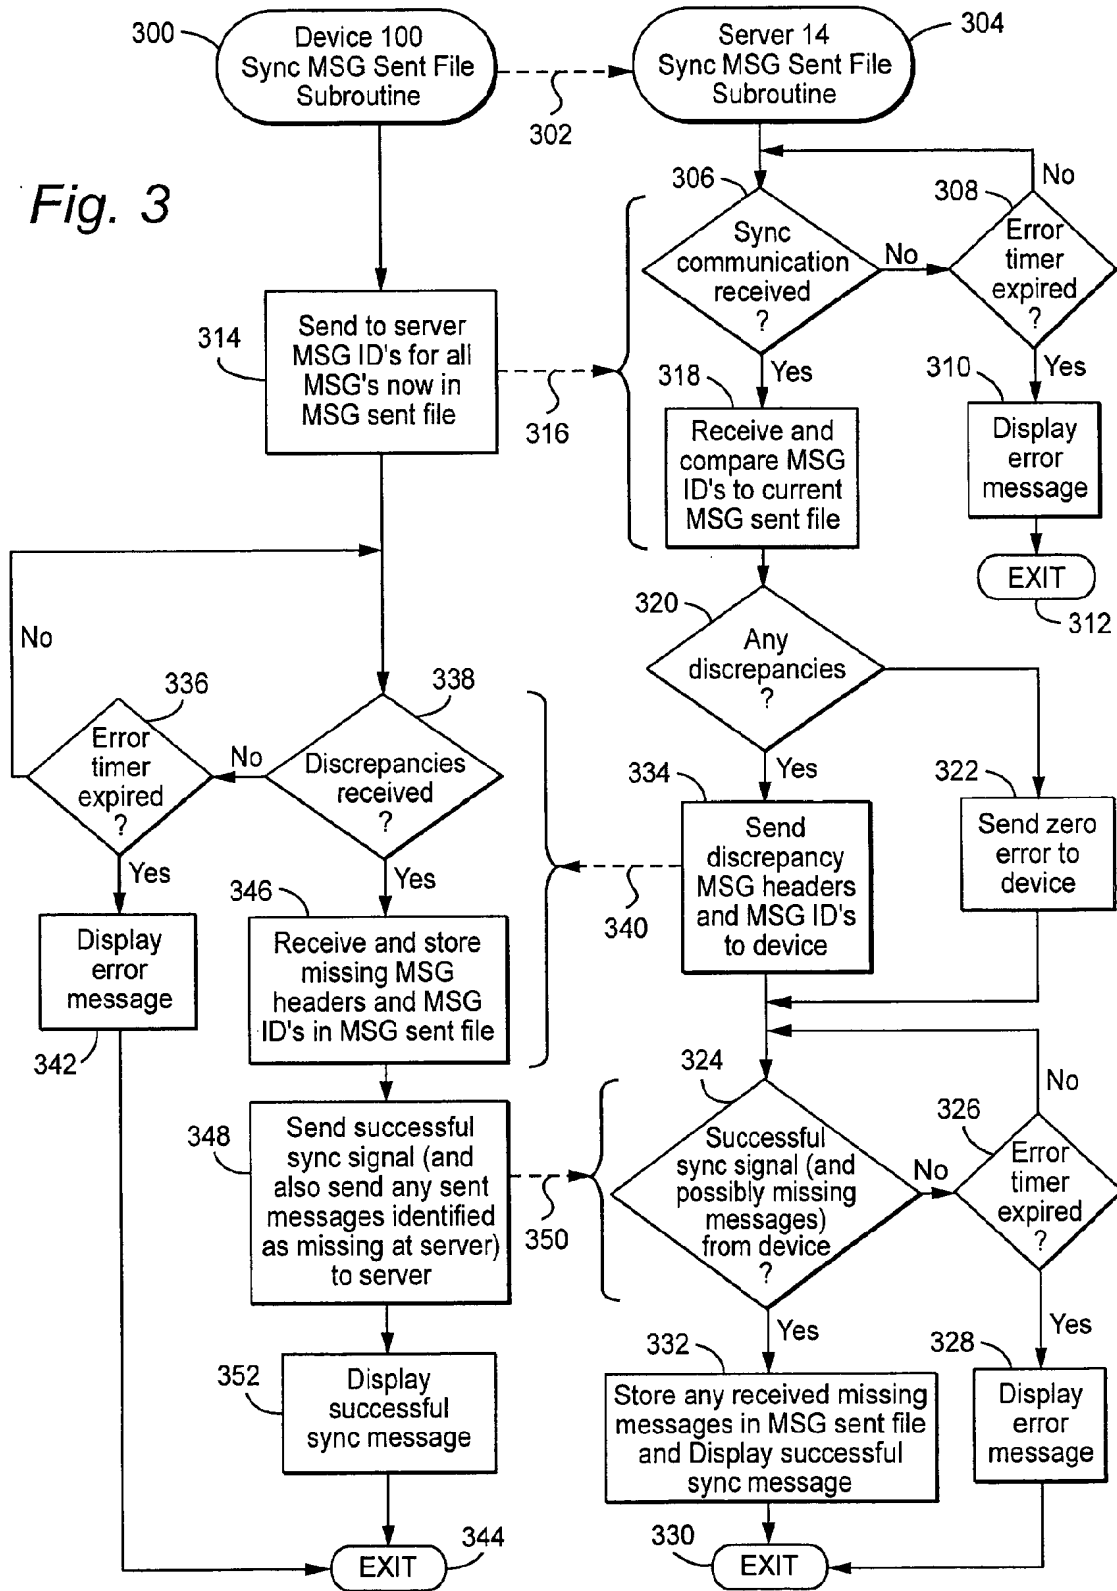


Fig. 2

Fig. 3



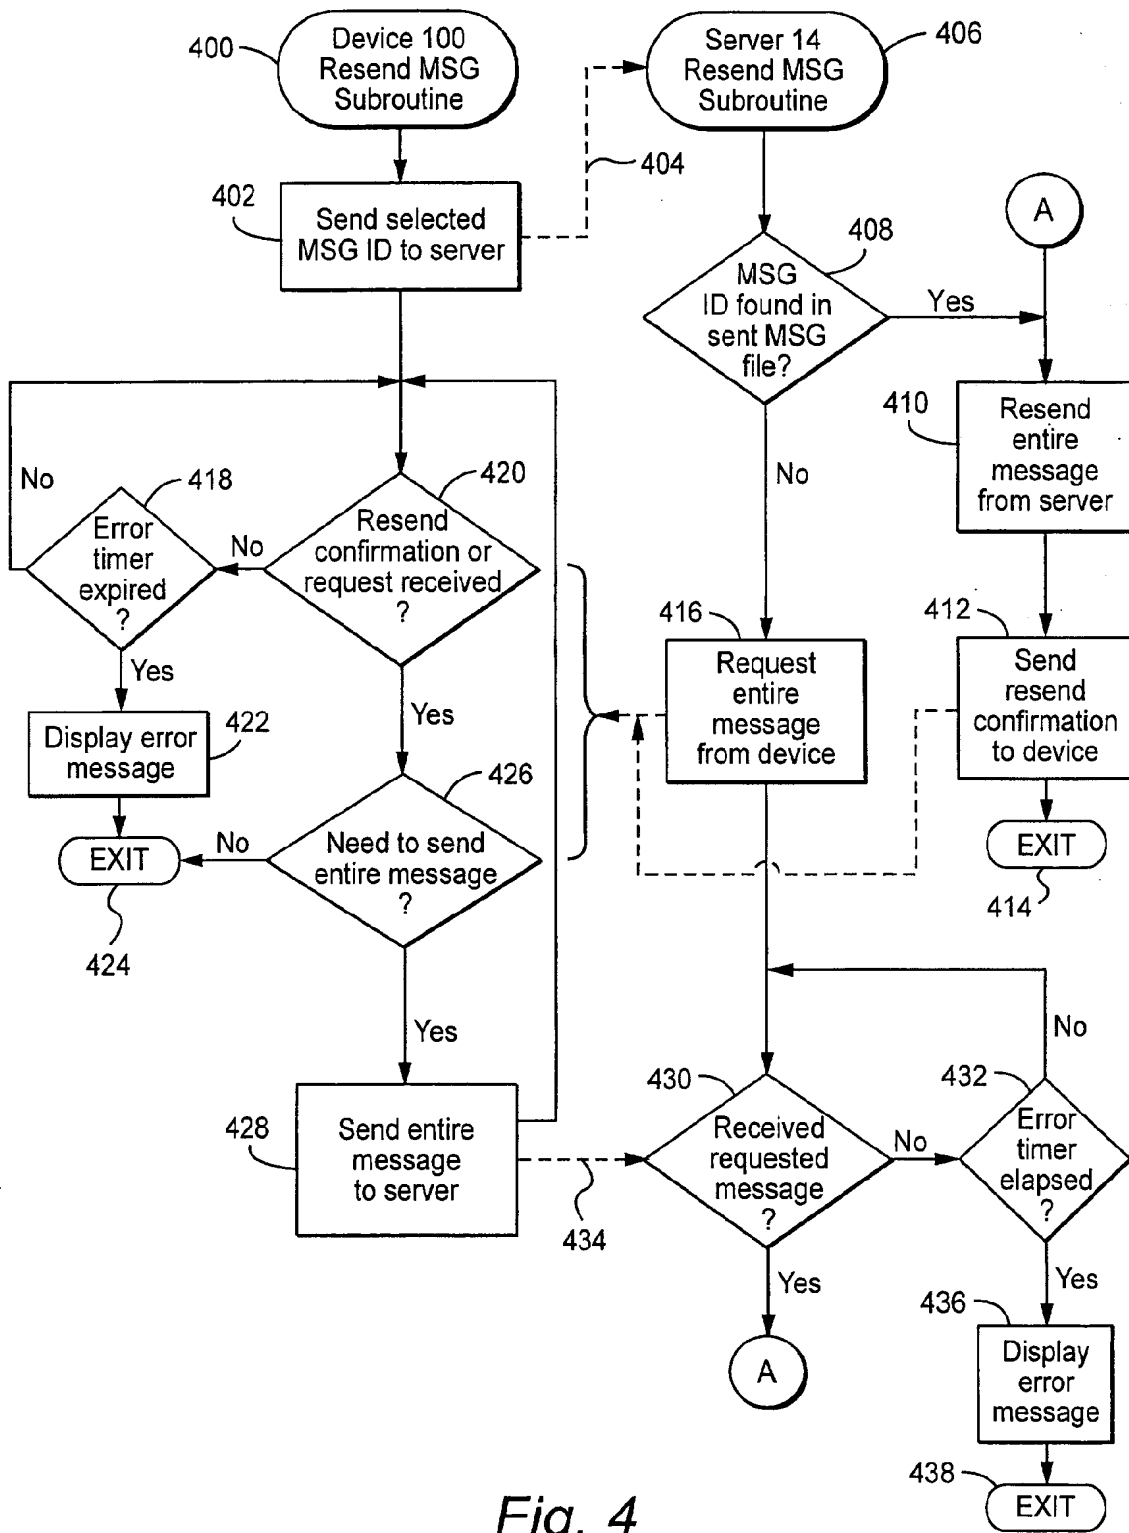


Fig. 4



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 04 25 7540

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 03/026235 A (RESEARCH IN MOTION LIMITED; SINHA, ANAND; LEWIS, ALLAN, D; CHERRY, CAR) 27 March 2003 (2003-03-27)	1,2,4-7, 9-12, 14-16, 18,19, 22,24	H04L12/58
Y	* page 31, line 19 - page 33, line 10; figures 7,10 * * page 39, line 1 - page 40, line 7 * -----	3,8,13, 17,20,23	
Y	EP 1 339 195 A (MICROSOFT CORPORATION) 27 August 2003 (2003-08-27)	3,8,13, 17,20,23	
A	* paragraphs [0004] - [0006], [0042] - [0045], [0049], [0050]; figure 3 * -----	1,2,4-7, 9-12, 14-16, 18,19, 22,24	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04L G06F
The present search report has been drawn up for all claims			
Place of search <b>Munich</b>		Date of completion of the search <b>6 May 2005</b>	Examiner <b>Frey, R</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	

3  
EPC FORM 1503 03.02 (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 25 7540

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-05-2005

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 03026235 A	27-03-2003	WO 03026235 A1	27-03-2003
		CA 2461075 A1	27-03-2003
		EP 1428363 A1	16-06-2004
		US 2004266441 A1	30-12-2004
-----			
EP 1339195 A	27-08-2003	US 2003163515 A1	28-08-2003
		EP 1339195 A2	27-08-2003
		JP 2003296254 A	17-10-2003
-----			